



SPINN D2.2

A compact, high performance
compressed air solution.



SPINN D2.2





SPINN D2.2 overview

- Superior performance and efficiency over belt-driven piston compressor
- Quiet operation as low as 59 dB(A)
- High reliability and unit longevity delivering improved lifecycle cost of ownership
- Robust air network and tools protected against corrosion and damage
- Quick, easy and cost-effective maintenance
- Space saving design
- Environmentally compliant

Key features

- Latest generation of screw compressor, technology with fully integrated aluminum block and direct driven transmission
- Maximum pressure up to 10 bar
- Compact and portable for easy mobility
- Low noise and vibration for close point of use (POU) and minimum piping
- Plug-and-play operation with no expertise required
- High efficient direct transmission contributes to high reliability and easy maintenance

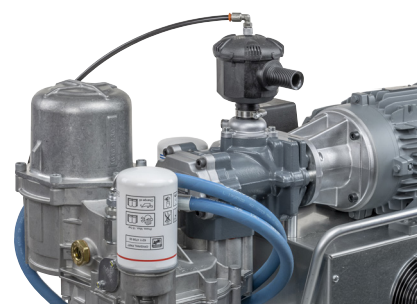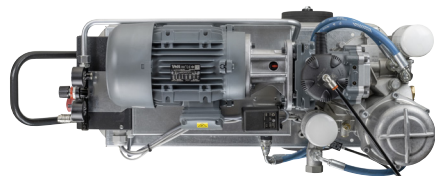

Easy maintenance

Portable

New integrated block

Model					
	Max. working pressure	Free Air Delivery *	Motor power	Noise level **	Tank Mounted (wheels) 90 L
	bar	psi	l/min	CFM	kW
				HP	dB(A)
SPINN D2.2	10	145	272	9.9	2.2
					3
					59
					112
					160
					160

Model	Length	Width	Height
	mm		
SPINN D2.2 90L W	1105	495	1085
SPINN D2.2 200L W	1430	616	1268
SPINN D2.2 200L	1430	450	1157

* Unit performance measured in 8.5 bar according to ISO1217, Annex C, latest edition

** Noise level measured according to ISO 2151:2004 using ISO 9614/2 (sound intensity method).

60 Hz available

